

Packaging



Mixing - Primer



Mixing - Bonding Slurry (Primax)



Mixing - Mortar Additive



Uses - Primer



Application



Uses - Bonding Slurry (Primax)



Application



Substrates

PRIMER
Concrete, Brick,
Block, Render,
Building boards
ADDITIVES
Concrete, Brick,
Block, Render

Primer/bonding & waterproofing additive

Description

Kemcrete is an acrylic, liquid-based admixture and primer for structurally sound concrete and mortar mixtures.

Uses

Primer

Primer for internal, dry applications.

Do not use in immersed applications.

Use to bond screeds, renders and concrete toppings to porous concrete, brick, block etc. (Do not use as a primer in permanently immersed applications i.e. pools, tanks, etc., use **Bonding Slurry (Primax)**).

Bonding Slurry (Primax)

Primer for internal, external and immersed applications.

Mortar Additive – use to make waterproof renders, floor toppings, graded screeds, renders and patching compounds.

Kemgrip Additive – improves bond strength and water resistance of **Kemgrip** ceramic tile adhesives.

Features

Primer

Primer for internal, dry applications.

Do not use in immersed applications.

Kemcrete	Water	Coverage
1L	1L	15m ²

Bonding Slurry (Primax)

Primer for internal, external and immersed applications.

Kemcrete	Cement	Coverage
1L	1kg	4m ²

Mortar Additive

Kemcrete	Water	Cement	Sand
1L	3L	1 part	3 parts

Kemgrip Additive

Kemcrete	Water	
1L	4L	Add to 20kg bag Kemgrip

Coverage (Approximate)

Primer

15m²/litre

Bonding Slurry (Primax)

3-4 m²/litre

Mortar Additive

1m²/litre (10mm thick in a 3:1 sand/cement mix)

Performance Data

Primer

Shear bond strength (kgf/cm ²)	No Bond Coat	PVA	Kemcrete
7 day dry	2:25	6.26	26.65
28 day dry	2:25	6.54	35.72
7 day dry-7 day wet	6.26	7.45	20.04

Additive

	3:1 Mortar		Kemcrete/Mortar 1L Kemcrete 3L water 1 cement:3 sand	
	Dry	Wet	Dry	Wet
Tensile strength	3.1 N/mm ²	1.8 N/mm ²	5.1 N/mm ²	4.8 N/mm ²
Flexural strength	7.2 N/mm ²	5.9 N/mm ²	12.4 N/mm ²	11.6 N/mm ²
Adhesion to concrete	0.1 N/mm ²	0.3 N/mm ²	4.0 N/mm ²	1.7 N/mm ²
Adhesion to steel	Nil	Nil	1.8 N/mm ²	1.6 N/mm ²

Specification

The primer/bonding additive should be acrylic based having a minimum solids content of 40%, such as **Kemcrete** manufactured by **Construction Chemicals** and shall be applied strictly in accordance with the manufacturer's instruction.

Surface Preparation

The surface to be treated must be free from dirt, dust, grease, oil, efflorescence, laitance and other contaminants.

Application

Primer – Dilute 1 part **Kemcrete** with 1 part water. Apply with a broom or brush, forcing it into the surface pores. Wait 15-30 minutes before applying the new topping.


Bonding Slurry (Primax) – Mix one part **Kemcrete** with one part cement to make a stiff brushable mixture. Apply the mixture with a stiff broom or brush to the dampened surface forcing it into the pores of the surface.

Mortar Additive – Mix the **Kemcrete** with water prior to mixing with cement and sand as directed. Adjust mix to suit user's preference.

Kemgrip Additive – Mix 1 litre of **Kemcrete** with 4 litres of water and mix with **Kemgrip**.

Must be applied in accordance with all relevant **Construction Chemicals** technical information:
www.constructionchemicals.com.au/tech-info/

Additive

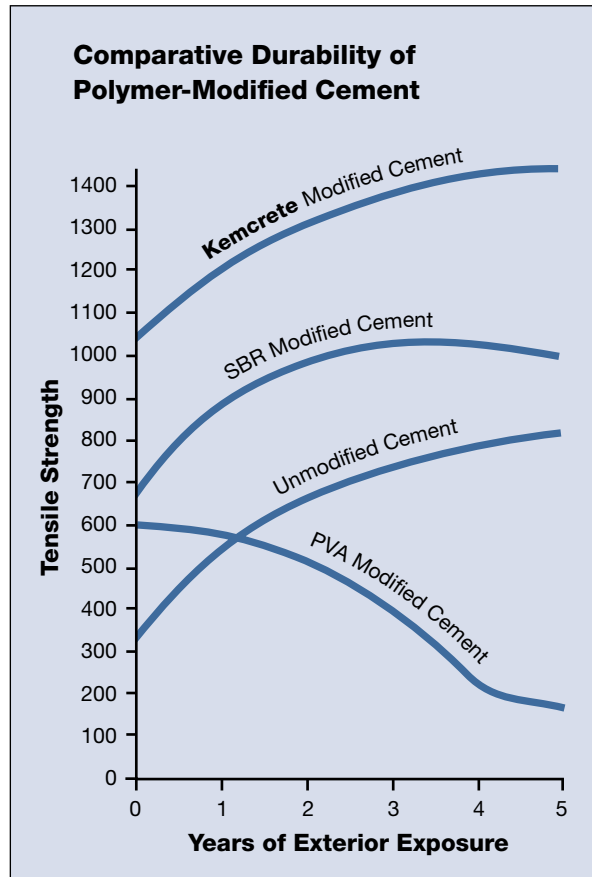

Shelf Life

When stored in the original, unopened packaging, in a dry place @ 23°C @ 50% relative humidity, the product has a 24 month shelf life.



www.constructionchemicals.com.au

Adelaide (08) 8243 7888
Brisbane (07) 3271 2944
Melbourne (03) 9761 4711
Perth (08) 9356 9999

Sydney (02) 9756 3533
Auckland (09) 273 5444
Kuala Lumpur (603) 5122 2522

The information contained in this technical publication is based on our current knowledge and experience and is provided as a guide only. In view of the many factors that may affect application it is the user's sole responsibility to ensure suitability for a specific purpose. Always refer to the most recent technical datasheet for the product concerned at: www.constructionchemicals.com.au