

# PRODUCT GUIDE



**ACOUSTIC SYSTEMS**

**WATERPROOFING MEMBRANES**

**CERAMIC TILE ADHESIVES**


**GROUTS**

**PRIMERS & ADDITIVES**

**DAMPPROOFING & WATERPROOFING**

**PATCHING & LEVELLING**

**TIMBER FLOORING**

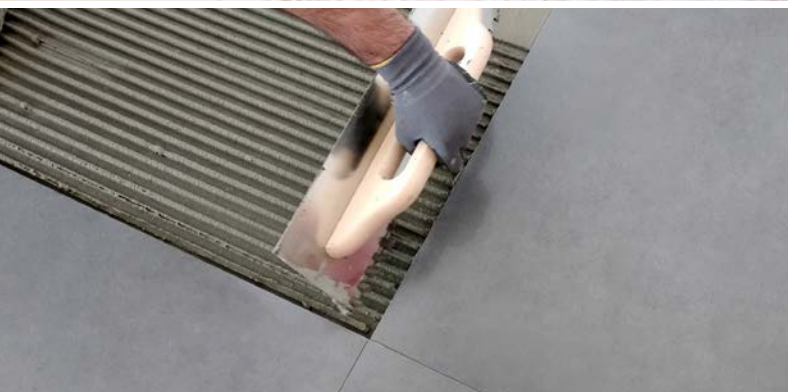

**CLEAR SEALERS**

**COATINGS**

**SEALANTS**



**MAINTENANCE**

**Dribond** CONSTRUCTION  
CHEMICALS

[constructionchemicals.com.au](http://constructionchemicals.com.au)

# MANUFACTURER'S GUARANTEE

**ACOUSTIC SYSTEMS**  
**WATERPROOFING MEMBRANES**  
**CERAMIC TILE ADHESIVES**

## **10 Year Manufacturer's Guarantee**

Dribond Construction Chemicals manufacture products in Australia, Asia and New Zealand with over 45 years of manufacturing experience.

Dribond Construction Chemicals guarantees its products for 10 years when applied strictly in accordance with its written application instructions, relevant standards or codes, good trade practice to properly prepared and structurally sound substrates.

The application of its products is beyond the manufacturer's control and it is the sole responsibility of the purchaser to determine the suitability of the product for their particular purpose.

The guarantee is for 10 years from the time of application and covers only the cost of material and labour of the original installation when the product is proved and acknowledged to be faulty.



# DRIBOND CONSTRUCTION CHEMICALS

Australian Made and Owned, Dribond Construction Chemicals has been in business since 1974 and has grown into one of the most respected ceramic tile adhesive, waterproofing and repair product manufacturers in Australia, New Zealand and Asia/Pacific, with 7 locations including Adelaide, Brisbane, Melbourne, Perth, Sydney, Auckland and Kuala Lumpur.

## Research and Development

Dribond Construction Chemicals has a long and successful history of research and development into improving their product performance and keeping abreast of an ever changing building climate.

Demands on product integrity have never been greater, but with a dedicated team of highly qualified technicians, and heavy investment in their new high-tech, state-of-the-art laboratory in Adelaide, Dribond Construction Chemicals are placing themselves at the forefront of a very competitive market.

Products manufactured to the highest standard, to meet the toughest conditions is the benchmark of Dribond Construction Chemicals. A leader in acoustic development, this new facility and testing equipment enables Dribond Construction Chemicals to bring the very best of products to the market, where results speak for themselves.



High-tech, state-of-the-art laboratory and Head Office in South Australia.



# Soundproofing concrete floors

Save time and cost soundproofing concrete floors in multilevel buildings using high-quality Australian developed and made mat/adhesive to bond ceramic tiles internally/externally on balconies and wet areas.

## Benefits

- Up to 50% cost saving
- Permanently bonded and does not become drummy like some competitive products
- Water-based and green-friendly
- Faster and simpler to apply
- Exceeds the acoustic requirements of the Building Code

Create a fully-bonded acoustic bed with Acoustibond.

Acoustibond is a water-resistant, acrylic/rubber crumb, ceramic, porcelain and stone tile adhesive with soundproofing properties. Suitable for shower alcoves and balconies. Embedding tiles into the Acoustibond adhesive creates a fully-bonded 4mm acoustic bed with no voids.



Self-level floors with acoustic underlays before tiling.



# ACOUSTIC SYSTEMS



## ACOUSTIBOND

Water-resistant, soundproofing\* ceramic, porcelain and stone tile adhesive.

### Coverage

2 x 12.5kg powder plus 20L liquid / 8-10m<sup>2</sup> using 15mm notched trowel, over a true surface to give a minimum 3mm dry adhesive bed thickness.



## ACOUSTIFLOR

Soundproofing\* and anti-fracture membrane.

### Coverage

20 litres of liquid mixed with 20kg of powder covers 7m<sup>2</sup> at 6mm thick using a 6mm Dribond pegged trowel.




## ACOUSTISCREED

Soundproofing\* ceramic, porcelain and stone tile screed.


### Coverage

2 x 12.5kg powder plus 20L liquid covers approximately 5-6m<sup>2</sup> at 6mm thick using a 6mm Dribond pegged trowel.

\* Impact noise

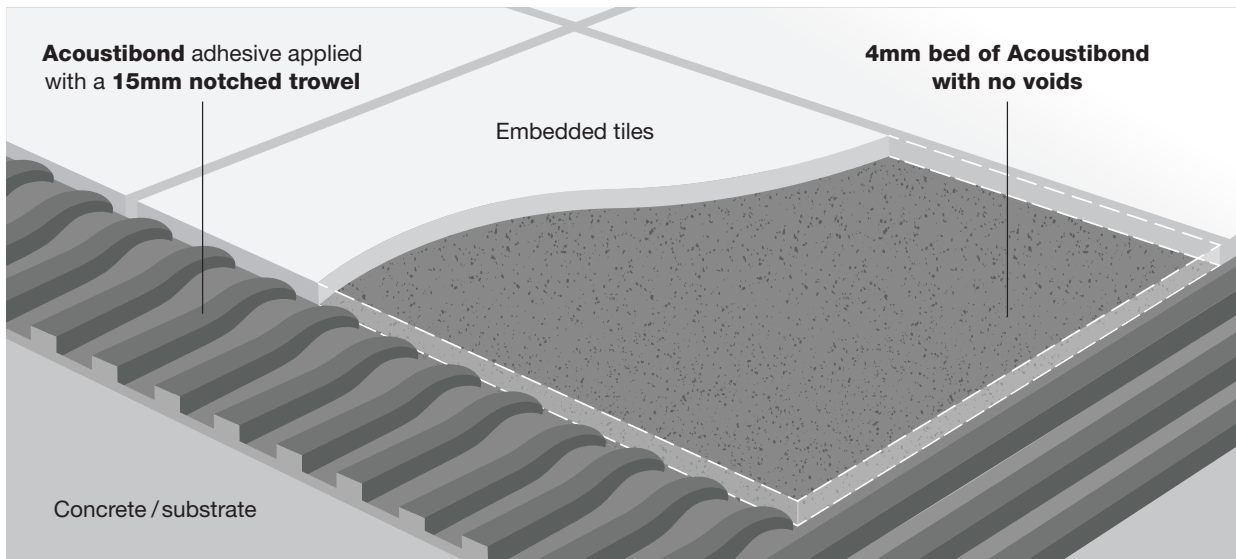

## Application

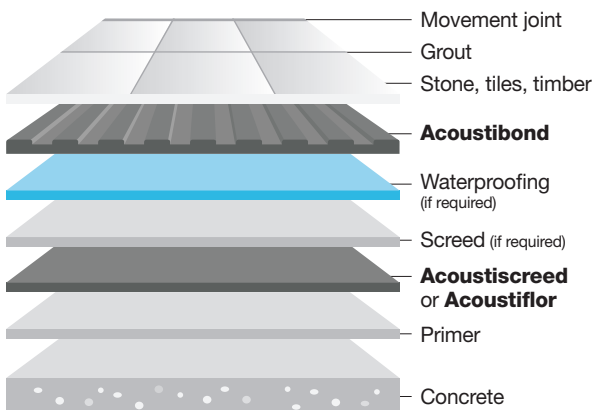

## Impact noise test results

200mm concrete slab 150mm cavity (no insulation) 13mm plasterboard	Decibels (dB) L'nT,w	Noise reduction
<b>Bare Floor</b>	60dB	<b>Changes in sound level</b> 3dB=Clearly noticeable, 10dB=Half as loud
10mm thick ceramic tiles 3mm <b>Acoustibond</b>	48dB	12dB
10mm thick ceramic tiles 3mm <b>Acoustibond</b> 6mm <b>Acoustiscreed</b>	45dB	15dB
10mm thick ceramic tiles 3mm <b>Acoustibond</b> 6mm <b>Acoustiflor</b>	44dB	16dB

The L'nT,w rating will vary depending on the building construction (i.e. concrete thickness, strength, use of suspended ceilings, density of tile/stone, and installation details). An accurate test is recommended for specific site performance figures.

# WATERPROOFING MEMBRANES



## FLEXIBLE SEALER

One-pack waterproofing membrane applied prior to tiling bathrooms & balconies or left exposed on roofs & balconies.

### Coverage

Two coats give a final coverage of 2L/m<sup>2</sup> (dry film thickness 1.5mm).



## HYDRATHANE

Water-based, polyurethane waterproofing membrane.

### Coverage

**Floors:** Apply two wet coats 0.8mm (800µm) to the floor and 100mm up the surrounding walls to obtain a 1mm (1000µm) dry film thickness.

A 15 litre pail covers 10m<sup>2</sup>.

**Walls:** Apply two wet coats 0.5mm (500µm) to obtain a 0.6mm (600µm) dry film thickness.

A 15 litre pail covers 15m<sup>2</sup>.



## LIQUID FLASH 1

Reinforced, brush applied waterproofing membrane.

### Coverage

Two coats give a final coverage of 2L/m<sup>2</sup> (dry film thickness of 1.5mm).



## LIQUID FLASH 2

Two-pack, fast drying, microfibre reinforced, waterproofing and anti-fracture membrane.

### Coverage

20L/20kg pack covers 14-18m<sup>2</sup> (2 coats), dry film thickness 1.5mm.



## SHOWER WATERPROOFING KIT

**A fast cure, easily applied waterproofing system prior to tiling.**

A waterproofing kit for enclosed shower alcoves. Suitable for use on concrete and compressed cement sheet flooring and walls constructed of brick, block, render, cement sheeting and waterproof gypsum building board.

## CONTENTS

- 2 x 4L Liquid Flash 1
- 1L Primebond
- Bond Breaker Tape
- 140mm Reomat
- Brush

# SELECTION GUIDE

WATER-BASED POLYURETHANE		ONE-PACK ACRYLIC		TWO-PACK ACRYLIC	WATERPROOFING
HYDRATHANE	FLEXIBLE SEALER	LIQUID FLASH 1		LIQUID FLASH 2	
				● Under screed or tiles	Swimming pools - tanks
●	●		●	●	Basement - retaining walls
●				●	Same day tiling - wet areas, showers, bathrooms
●	●		●	●	Wet areas, showers, laundries, bathrooms
	●		●		Gutters
●	●		●	● Under screed or tiles	Roofs - balconies
TECHNICAL INSTRUCTION SHEET					
●	●		●	●	Shower waterproofing system
●	●		●	●	Wet area waterproofing system
●				●	Fast cure wet area waterproofing
●	●		●	● Under screed or tiles	Waterproofing balconies, rooftops and planter boxes
●	●		●	●	Waterproofing basement walls

# CERAMIC TILE ADHESIVES



## ACOUSTIBOND

Soundproofing ceramic, porcelain and stone tile adhesive.

### Coverage

2 x 12.5kg powder/20L liquid will cover 8-10m<sup>2</sup> using a 15mm notched trowel.



## BONDFIX

Polymer-modified, cement-based, ceramic, porcelain and stone tile adhesive.

### Coverage

7-8m<sup>2</sup> per 20kg bag using a 10mm notched trowel.



## CEMFLEX

One-pack, polymer-modified, rubber-based tile adhesive.

### Coverage

20kg will cover 7-8m<sup>2</sup> using a 10mm notched trowel, over a true surface.



## DRYMASTIC

White, cement-based, non-slip/slump tile adhesive.

### Coverage

6mm notch trowel 10m<sup>2</sup>/20kg  
10mm notch trowel 7m<sup>2</sup>/20kg




## DURAFLEX

One-pack, polymer, rubber, tile adhesive.

### Coverage

20kg will cover 10m<sup>2</sup> with a 10mm notched trowel.

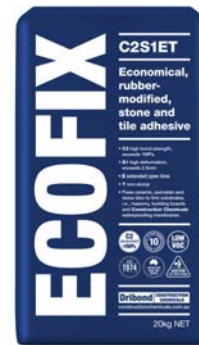

## ECOFIX

Economical, rubber-modified, stone and tile adhesive.

### Coverage

8m<sup>2</sup> per 20kg using a 10mm notched trowel.



## ELASTACRETE

Flexible, acrylic additive for **Kemgrip Floor & Wall**.

### Coverage

5-6 litres per 20kg **Kemgrip Floor & Wall**, covers 3-6m<sup>2</sup> depending on the trowel size.



## FASTFLEX

One-part, fast-setting, flexible tile adhesive.

### Coverage

6-7m<sup>2</sup> depending on the surface and notch trowel size.



## GRIPFLEX

Premium, flexible, white, mastic adhesive.

### Coverage

20kg will cover 13-16m<sup>2</sup> using a 6mm notched trowel, over a true surface.





### HYDRABOND

Premium, white, multipurpose, for permanently immersed applications.

**Coverage**

6mm notch - 12-15m<sup>2</sup> / 20kg  
10mm notch - 8-10m<sup>2</sup> / 20kg



### HYDRALITE

Premium, white or grey, lightweight, multipurpose, for permanently immersed applications.

**Coverage**

6mm notch - 10-12m<sup>2</sup> / 13.5kg  
10mm notch - 6-8m<sup>2</sup> / 13.5kg



### KEMFLEX

Flexible ceramic tile adhesive.

**Coverage**

20 litres of liquid mixed with 40kg of powder covers between 18-22m<sup>2</sup> (10mm notched trowel).



### KEMGRIP FLOOR & WALL

Waterproof ceramic tile adhesive with extra bond.

**Coverage**

3-6m<sup>2</sup> per 20kg, depending on tile size and trowel.



### KEMGRIP STANDARD

Waterproof ceramic tile adhesive.

**Coverage**

3-6m<sup>2</sup> per 20kg, depending on tile size and trowel notch size.



### KEMGRIP SUPER

Waterproof ceramic tile adhesive with extra grip.

**Coverage**

3-6m<sup>2</sup> per 20kg, depending on tile size and trowel notch size.



### MACROFIX

Rubber-modified, cement-based adhesive with easy trowelling and extra coverage.

**Coverage**

20kg will cover 12-15m<sup>2</sup> (10mm notched trowel)



### MACROLITE

Rubber-modified, lightweight, cement-based adhesive with easy trowelling and extra coverage.

**Coverage**

13.5kg will cover 7-8m<sup>2</sup> (10mm notched trowel)



### MIGHTYMASTIC

White, non-sanded, non-slip/slump tile adhesive.

**Coverage**

6mm notch trowel 10m<sup>2</sup>/20kg  
10mm notch trowel 7m<sup>2</sup>/20kg

# CERAMIC TILE ADHESIVES



## MONOFLEX

High-strength, highly flexible, premium, non-slump/lipping, economical and multipurpose.

### Coverage

20kg covers 10m<sup>2</sup>+ using a 10mm notched trowel (floors)



## MONOLITE

High-strength, highly flexible, premium, non-slump/lipping, lightweight and multipurpose.

### Coverage

13.5kg covers 7-8m<sup>2</sup> using a 10mm notched trowel (floors)



## MOSAICBOND

Flexible, glass mosaic adhesive/grout.

### Coverage

1L with 2.4kg Kemgrout Flexible, 1L with 3.6kg Kemgrout Sanded will cover approx 1.0-1.2m<sup>2</sup>.



## RAPIDFIX

Fast-setting, two-pack adhesive.

### Coverage

4m<sup>2</sup> per 20kg/5L pack using 10 x 10mm notched trowel.



## SUREFIX

White, premixed, economical, thin bed, acrylic-based ceramic tile adhesive.

### Coverage

2kg per m<sup>2</sup>



## TILEMASTIC

Premium, white, premixed, non-slip, flexible wall adhesive.

### Coverage

2kg per m<sup>2</sup>



## ULTIMA

Two-pack, white, flexible, premium tile adhesive.

### Coverage

5L liquid / 12.5kg powder covers 3.5-4m<sup>2</sup> / 10mm notched trowel and 6-7m<sup>2</sup> / 6mm notched trowel.



## VITRIGRIP

Water-resistant tile adhesive.

### Coverage

3-6m<sup>2</sup> per 20kg, depending on tile size and trowel notch size.

# SELECTION GUIDE

		FIRM		FLEXING														FLEXIBLE								
				Cement based										Paste												
				KEMGRIP	RAPIDFIX	VITRIGRIP	ACOUSTYBOND	CEMFLEX	DRYMASTIC	DURAFLEX	ECOFIX	ELASTACRETE *	FASTFLEX	GRIPFLEX	HYDRABOND / HYDRALITE	MACROFIX / MACROLITE	MIGHTYMASTIC	MONOFLEX	MONOLITE	SUREFIX	TILEMASTIC	KEMFLEX	MOSAICBOND	ULTIMA		
SUBSTRATE																										
FLOORS																										
																										Concrete
																										Cement sheet (compressed)
																										Timber (tongue & groove, structural) must have cement sheet underlay fixed
																										Commercial floors
																										Heated slabs
WALLS																										
																										Masonry - concrete, render, brick, block
																										Building boards, cement, gypsum
OTHER																										
#																										Swimming pools (concrete and render)
																										Old tiles
																										Mosaic tiles (made of glass)
																										Moisture sensitive stone
																										Fast set
																										Acoustic adhesive
																										Driveways and high point loads

Note: Current technical data sheets must be referred to, to ensure correct use and application.

● Preferred adhesive specification    ○ Suitable adhesive    \* Mixed with **Kemgrip F&W**    # F&W/Super mixed with **Kemcrete**

# GROUTS




## EPEGROUT

Water washable epoxy grout.

### Coverage

0.6kg/m<sup>2</sup> for 150mm x 150mm tiles x 3mm gap.

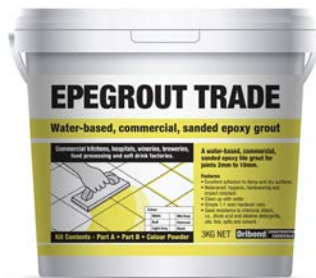

## EPEGROUT TRADE

A water-based, commercial, sanded epoxy grout for joints 2mm to 10mm.

### Coverage

1.2kg/m<sup>2</sup> for 200mm x 200mm tiles x 6mm joint.



## EPEGROUT ULTRA

Easy clean off, solvent-free, pool grade epoxy grout.

### Coverage

1.2kg/m<sup>2</sup> for 200mm x 200mm tiles x 6mm joint.



## GROUT SHIELD

Water-based grout sealer (does not change the grout's appearance).

### Coverage

3-8m<sup>2</sup> per coat/250ml, depending on grout width and porosity.



## KEMGROUT FLEXIBLE

Waterproof tile grout, mould and fungi resistant.

### Coverage

Wall tiles 0.5kg/m<sup>2</sup>  
Mosaics 1.0kg/m<sup>2</sup>  
Over 3mm joints 1-2kg/m<sup>2</sup>



## KEMGROUT SANDED

Fine-finish waterproof tile grout, chemical and acid resistant.

### Coverage

1-2kg/m<sup>2</sup>



# GROUTS COLOUR SELECTION GUIDE

## KEMGROUT FLEXIBLE / EPEGROUT



522 Beige



528 River Sand



527 Tan



548 Terracotta



547 Dark Sand



544 Light Mocca



543 Dark Mocca



500 Volcanic Ash



512 Green



506 Light Blue (Not for immersed applications)




536 Burgundy



525 Almond



518 Ivory




519 Vanilla



501 White



507 Mist Grey



505 Light Grey



549 Mid Grey



504 Slate Grey



503 Charcoal

## KEMGROUT SANDED



Buff



Sand



Light Beige



Tan



Terracotta



Mocca



Light Grey



Mid Grey



Charcoal



Black ●

## EPEGROUT TRADE / EPEGROUT ULTRA



White



Buff



Light Grey



Mid Grey



Charcoal



Black

# PRIMERS & ADDITIVES



## ACRYBOND

Primer for masonry and bonding additive to cement-based mixtures.

### Coverage

Primer: 22m<sup>2</sup>/litre  
Bonding Agent: 5m<sup>2</sup>/litre (5mm)



## KEMBOND

Primer for glazed and porcelain tiles.

### Coverage

6-10m<sup>2</sup>/litre



## KEMCRETE

Primer/bonding and waterproofing additive.

### Coverage

Primer: 15m<sup>2</sup>/litre  
Bonding Slurry: 3-4 m<sup>2</sup>/litre  
Mortar Additive: 1m<sup>2</sup>/litre (10mm thick in a 3:1 sand/cement mix)



## PRESTO

Liquid set accelerator for screeds and cement mixes. Use in place of mixing water.



## PRIMAX

Two-component liquid and powder, water-resistant bonding primer.

### Coverage

5L/5kg covers 20m<sup>2</sup>



## PRIMEBOND

Primer and grout additive.

### Coverage

Primer: 8m<sup>2</sup>/litre  
Grout additive: 2-3 litres per 20kg of **Kemgrout**.



## SUPER PRIME

A water-based primer for non-porous surfaces.

### Coverage

8-10m<sup>2</sup>/litre



## ELASTABOND

Resin dispersion to fortify cement flooring compounds. Use in place of mixing water.

# DAMPPROOFING & WATERPROOFING



## CEMCOTE

Cement-based waterproof paint.

### Coverage

Brush: 0.5mm thick = 0.75kg/m<sup>2</sup>

1.0mm thick = 1.5kg/m<sup>2</sup>

Trowel: 2.0mm thick = 3kg/m<sup>2</sup>



## CRYSTAL SEALER

Waterproofing compound.

### Coverage

0.8-1.1kg/m<sup>2</sup>/coat

(2 coats required)



## DAMPCURE

Liquid Dampcourse.

### Coverage

1.2-1.5 litres/m of 115mm brick

2.3-3 litres/m of 230mm brick



## EPECRETE

Multipurpose, water-based, epoxy moisture barrier.

### Coverage - 3kg kit

Dampproofing: 9m<sup>2</sup> (2 coats)

Primer: 18m<sup>2</sup> (1 coat)



## REINFORCED RENDER

Glass fibre, reinforced, high-performance waterproof render.

### Coverage

4m<sup>2</sup> per 20kg bag 3mm thick



## SHOWER FIX

Waterproofs tiled areas without removing tiles.

### Coverage

500ml will treat approx. 15m<sup>2</sup>



# PATCHING & LEVELLING



## CONCRETE HARDENER

Chemically hardens concrete floors.

### Coverage

Allow at least 1 litre per 4m<sup>2</sup> per coat (two coats are required).



## CURE & SEAL

Chlorinated, rubber-curing compound.

### Coverage

Steel trowelled surface: 10m<sup>2</sup>/L  
Wood floated: 5-7m<sup>2</sup>/L



## DRISCREED

Premixed cement sand screed.

### Coverage

20kg covers 1m<sup>2</sup> at 10mm thick.



## ELASTABOND

Resin dispersion to fortify cement flooring compounds.

Use in place of mixing water.



## FEATHER FLOOR

Trowel applied finishing underlay.

### Coverage

15-30m<sup>2</sup>/5kg bag depending on the surface condition.



## LEVEL FLOOR STANDARD

Durable, self-levelling underlay for ceramic tiles and timber floors.

### Coverage

1.5kg/m<sup>2</sup> per 1mm thickness



## LEVEL FLOOR TUFF

Hard-wearing, self-levelling flooring compound.

### Coverage

1.5kg/m<sup>2</sup> per 1mm thickness



## LEVEL FLOOR V15

Smooth, sandable, self-levelling underlay prior to laying carpet and vinyl.

### Coverage

1.5kg/m<sup>2</sup> per 1mm thickness



## NON-SHRINK GROUT

Class A expanding grout.

### Coverage

For each cubic metre of grout required allow approximately 100 x 20kg bags.





### PATCH & ANCHOR

Fast-setting patching compound.

**Coverage**  
15kg/m<sup>2</sup> at 6mm thickness



### QUICKCRETE

Fast-setting mortar - 15-20min. set - just add water.



### RAPID SET 45

Non-slump, fast-set, patching and repair compound.

**Coverage**  
1.5kg/m<sup>2</sup> per 1mm thickness



### REINFORCED SCREED

Impact-resistant flooring compound.

**Coverage**  
3mm thick - 5kg/m<sup>2</sup>  
5mm thick - 8kg/m<sup>2</sup>



### SKIMFINISH

Thin, decorative cement floor finish.

**Coverage**  
4m<sup>2</sup> per 20kg bag at 3mm thickness.



# CLEAR SEALERS



## DURATHANE

Two-pack, aliphatic polyurethane, high gloss, clear coating.

### Coverage

8m<sup>2</sup>/litre/coat (2 coats minimum)



## GREENSEAL

Premium, clear, penetrating sealer for polished porcelain and natural stone.

### Coverage

8-35m<sup>2</sup>/litre, depending on surface porosity.



## GROUT SHIELD

Water-based grout sealer (does not change the grout's appearance).

### Coverage

3-8m<sup>2</sup> per coat/250ml, depending on grout width and porosity.



## KEMCOTE GLOSS

Clear, gloss, 'wet look' coating for porous surfaces and slate.

### Coverage

8-10m<sup>2</sup>/litre/coat



## MICRO SEAL

Clear, penetrating sealer for polished porcelain and natural stone.

### Coverage

20-30m<sup>2</sup>/litre



## NATURAL SEALER

Penetrating sealer that doesn't change the appearance.

### Coverage

8-10m<sup>2</sup>/litre/coat



## REVIVE & SEAL

A solvent-based, penetrating sealer for porous surfaces that highlights the substrate colour.

### Coverage

10-40m<sup>2</sup>/litre/coat



## SEALCOTE

Interior/exterior, water-based sealer that preserves the original appearance.

### Coverage

8-10m<sup>2</sup>/litre/coat



## STONE SEALER

Clear, gloss, water-based sealer.

### Coverage

10-12m<sup>2</sup> per litre

## PENETRATING SEALERS

Sealers that penetrate into the substrate and do not change the surface appearance.

### NATURAL SEALER

Penetrating Sealer

### SEALCOTE

Penetrating Sealer

## SURFACE SEALERS

Sealers that coat surfaces and give the substrate a wet look.

### STONE SEALER

Surface Sealer

### REVIVE & SEAL

Penetrating Sealer

### UNCOATED

### KEMCOTE GLOSS

Surface Sealer

### GREENSEAL

Penetrating Sealer

### MICRO SEAL

Penetrating Sealer

### DURATHANE

Surface Sealer

# COATINGS



## DECKGRIP

Slip-resistant, flexible, waterproof coating.

### Coverage

1m<sup>2</sup>/litre (2 coats)



## DRIVEWAY STAIN

A decorative concrete stain.

### Coverage

Wood float: 5-7m<sup>2</sup>/litre/coat (two coats are required). 3 coats may be required on some substrates.



## ELASTAKOTE

Flexible, acrylic waterproofing coating.

### Coverage

6m<sup>2</sup>/litre at 100 microns thick. 2 coats for normal applications. 3 coats for severe applications.



## EPESHIELD

Chemical and wear-resistant epoxy coating.

### Coverage

7m<sup>2</sup>/litre at 100 microns thick. Final application of 200 microns or greater is recommended.



## ROLTEX

Textured Finish.

### Coverage

2m<sup>2</sup> per litre



# COATINGS COLOUR SELECTION GUIDE

## STANDARD COLOUR RANGE



**20** White



**22** Off White



**25** Light Grey



**26** Cement Grey



**27** Mid Grey



**28** Cool Grey



**29** Dark Grey



**30** Cream



**33** Mint Green



**35** Light Sandstone



**36** Sand



**37** Mid Sandstone



**38** Burnt Orange



**39** Dark Sandstone



**45** Light Blue



**48** Steel Blue



**49** Dark Blue



**75** Light Brown



**85** Charcoal



**89** Black

## STANDARD COLOURS

### DRIVEWAY STAIN

**26** Cement Grey **35** Light Sandstone **37** Mid Sandstone **39** Dark Sandstone  
**85** Charcoal **89** Black

### ROLTEX

**20** White **25** Light Grey **30** Cream **45** Light Blue **75** Light Brown

### ELASTAKOTE

**20** White **25** Light Grey **30** Cream **45** Light Blue **49** Dark Blue **75** Light Brown

### DECKGRIP

**28** Cool Grey **29** Dark Grey **33** Mint Green **36** Sand **38** Burnt Orange **48** Steel Blue

### EPESHIELD

**20** White **22** Off White **25** Light Grey **27** Mid Grey **85** Charcoal **89** Black

# SEALANTS

# TIMBER FLOORING



## SEALFLEX

Multipurpose sealant and adhesive. Low VOC.

### Coverage

5mm x 5mm joints: 12m/cartridge  
10mm x 10mm joints: 3m/cartridge



## SMOOTHING AGENT

Smoothing agent for sealants.



## ELASTAFIX

One-component, hybrid polymer adhesive and sealant.

### Coverage

300ml cartridge covers  
12m x 5mm x 5mm

# MAINTENANCE



## CLEAN POWER

Powerful bathroom cleaner.

### Coverage

10-40m<sup>2</sup>/litre/coat



## KEMCLEAN

Tile, brick, stone and concrete cleaner.

### Coverage

10-15m<sup>2</sup>/litre undiluted



## TILE GRIP

Reduces slip on wet tiled floors.

### Coverage

1L covers approximately 10-12m<sup>2</sup>  
depending on surface type.

# PROMOTIONAL MATERIAL



## DL BROCHURES

- Ceramic Tiling Guide
- Dampcure
- Fixing Common Building Faults
- Kemgrout Colour Chart
- Noise in Multi-level Apartments
- Patching and Levelling
- Prevent Cracked Tiles
- Priming
- Product Range
- Sealers
- Soundproofing Between Floors
- Waterproofing
- Waterproofing and Repairing
- Waterproofing Shower Alcoves



## A4 CORFLUTE DISPLAY BOARDS

- Ceramic Tile Adhesives
- Clear Sealers
- Coloured Grout
- Deckgrip
- Driveway Stain
- Soundproofing Ceramic Tiles
- The Problem - Cracked Tiles
- Tiling Systems
- Waterproofing




## A1 CORFLUTE POSTERS

- Cemflex
- Drymastic
- Duraflex
- Ecofix
- Fastflex
- Gripflex
- Hydrathane
- Kemflex
- Level Floor Standard
- Level Floor Tuff
- Level Floor V15
- Monoflex
- Sealflex
- Tilemastic



## DISPLAY STAND

4 tiered display stand to hold DL brochures.



## A4 PRODUCT GUIDE

A pictorial guide on all products with descriptions and coverage information.




## A5 PRODUCT GUIDE

A comprehensive guide on all products and technical information.



## COLOURED GROUT SWATCH BOOK

150 x 20mm



## COLOURED GROUT SAMPLE BOARDS

Booklet - 150 x 225mm  
Display Board - 340 x 240mm



## A5 SAMPLE DISPLAY BOARD

Sealflex - 248 x 210mm



**Adelaide**

**Adelaide**

49-57 Davis St  
Wingfield SA 5013  
Phone (08) 8243 7888  
Fax (08) 8243 7800



**Brisbane**

**Brisbane**

45 Coulson St  
Wacol QLD 4076  
Phone (07) 3271 2944  
Fax (07) 3271 3892



**Melbourne**

**Melbourne**

11 Gabrielle Ct  
Bayswater North VIC 3153  
Phone (03) 9761 4711  
Fax (03) 9761 4748



**Perth**

**Perth**

11 Collie St  
Welshpool WA 6106  
Phone (08) 9356 9999  
Fax (08) 9356 9955



**Sydney**

**Sydney**

31-33 Newton Rd  
Wetherill Park NSW 2164  
Phone (02) 9756 3533  
Fax (02) 9756 3534



**Auckland**

**Auckland**

16 Carpenter Rd  
East Tamaki  
Phone (09) 273 5444  
Fax (09) 273 5442



**Kuala Lumpur**

**Kuala Lumpur**

Lot 2 Jalan Kecapi  
33/2 Elite Industrial Estate Off Jalan  
Bukit Kemuning 40400 Shah Alam  
Phone (603) 5122 2522  
Fax (603) 5122 2526

